

## TC-C35HSBL

## 5MP Starlight IR Dome Camera Black Edition

## Key Features

- Full Black metal housing
- Up to 2592×1944@18fps
- S+265/H.265/H.264 Codec
- Smart IR, IR Range: 30m
- -35°C ~ 65°C(IR OFF) / -35°C ~ 40°C(IR ON)
- PoE, IP66



## Technical Specification

## Camera

Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.002 Lux(F1.6,AGC ON) B/W: 0.001Lux(F1.6,AGC ON)
Shutter Time	1s to 1/100,000s
Lens	2.8mm
Lens Mount	M12
Day& Night	IR Cut Filter with Auto Switch
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR

## Compression Standard

Video Compression	S+265/H.265/H.264/MJPEG
Video Bit Rate	32Kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM/AAC
Audio Bit Rate	8K~48Kbps

## Image

Max. Image Resolution	2592x1944
Frame Rate	50Hz: 18fps (2592×1944),20fps (2560×1920), 25fps (2560×1440), 25fps (1920×1080),25fps (1280×960), 25fps (1280×720) 60Hz: 18fps (2592×1944),20fps (2560×1920), 25fps (2560×1440), 30fps (1920×1080),30fps (1280×960), 30fps (1280×720)
Main stream	5MP (2592*1944)
Sub-stream	4CIF (704×576)
3rd Stream	
Image Settings	Brightness, Saturation, Contrast, Flip Mode Adjustable by Client Software or Web Browser
HLC	Y
Smart Defog	Y

Corridor Format	Y
ROI	Y
Privacy Mask	Y
Picture Overlay	Y
OSD	16×16, 32×32, 24×24, 48×48, 64×64,96×96 Size Letters Such as Week, Date, Time, Total 5 Regions

## Network

Network Storage	FTP
NTP	Y
ANR	Y
Video Analytics	Tripwire/Double Tripwire/Perimeter/Object Abandon/Object Lost/Running/Loitering/Parking/Crowd/Audio Abnormal Detection/Video Abnormal Detection
EW	N/A
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict/Mask Alarm/Audio Abnormal Detection
Protocols	HTTP/802.1x/FTP/SMTp/UPnP/SNMP/DNS/ DDNS/NTP/RTSP/TCP/UDP/DHCP/PPPoE
Remote Connection	≤7
System Compatibility	ONVIF (Profile S), P2P, SDK, CGI

## Smart Feature


smart alarm	N/A
smart codec	N/A
smart image	N/A

## Interface

Audio Input	N/A
Audio Output	N/A
Mic In	1
Communication Interface	1-ch RJ45 10M / 100M Ethernet Interface
Alarm Input	N/A
Alarm Output	N/A
Video Output	N/A
On-board Storage	N/A

<b>Extension</b>	N/A
<b>General</b>	
<b>Language</b>	English, Simplified Chinese, Traditional Chinese, Spanish, Italian, Korean, Turkish, Russian, Thai, Polish, French, Dutch, Hebrew, Farsi, Arabic
<b>Operating Conditions</b>	-35°C ~ 60°C, 0 ~ 95% RHG
<b>Power Supply</b>	DC 12 V ± 25%, POE
<b>Power Consumption</b>	
<b>IR Light</b>	1pcs Array IR LEDs
<b>IR Distance</b>	30m
<b>White Light</b>	N/A
<b>Impact Protection</b>	IP66
<b>Dimensions</b>	115mm×115mm×97mm
<b>Weight</b>	

**Dimensions (mm)**

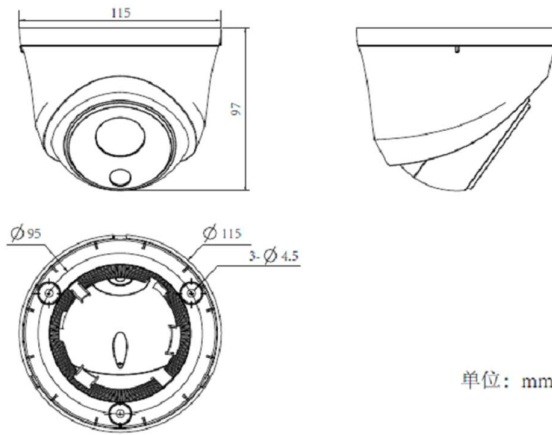

单位: mm